TECHNICAL BULLETIN

Characteristics of Textured Products



RZ-305-2014

Unevenness of a textured product is created by additional treatments to the polished product. Similar to a polished product, the textured product is non-porous and stain resistant. However, the roughness of the surface of a textured product may leave finger marks, metal marks etc, more easily than a polished product, especially the Suede Products. Frequent cleaning may be required to maintain a clean surface. When it is stained, promptly remove with a neutral detergent. In cases of heavy staining, use bleach reagent used in the kitchen and rinse the surface with water.

Textured Product

	Suede Product	Ruffle Product
Surface	- Matte, similar to Honed product	- Uneven texture and glossy polish
Gloss	App. 5~15%	App. 15~30%

This Technical Bulletin is intended to provide guidelines for optimal fabrication, installation, and performance of Samsung products mentioned. Though the information contained herein is deemed reliable, none of the contents--including but not limited to the instructions, techniques, graphics, and recommendations--is to be understood as implying legal liability of fitness for a specific purpose, any other type of warranty, or being complete or absolute in its range and nature of information.

Depending on the user's particular application, all necessary measures must be taken to verify and test the adequacy for such needs or application. Any information or recommendation herein is strictly for purposes of reference and as such, Samsung SDI assumes no responsibility for its suitability or accuracy or the use of such information for products other than Samsung Staron® solid surfaces & Radianz® quartz surfaces.



Characteristics of Coastal Collection




RZ-304-2014

Edge profile

To achieve continuous pattern flow from the top to the sides of edges, we recommend using a 45 degree miter joint construction.

- (a) Cut the back side of the joint edges using a 45 degree saw.
- b Adhere the 45 degree bevelled edges together to create a 90 degree angle.
- \odot Use a minimum of 3mm round fabrication for the tops of edges.

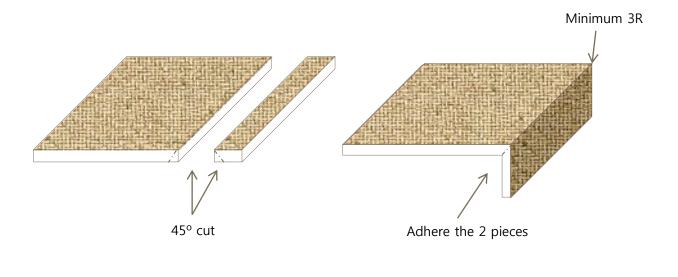



This Technical Bulletin is intended to provide guidelines for optimal fabrication, installation, and performance of Samsung products mentioned. Though the information contained herein is deemed reliable, none of the contents--including but not limited to the instructions, techniques, graphics, and recommendations--is to be understood as implying legal liability of fitness for a specific purpose, any other type of warranty, or being complete or absolute in its range and nature of information.

Depending on the user's particular application, all necessary measures must be taken to verify and test the adequacy for such needs or application. Any information or recommendation herein is strictly for purposes of reference and as such, Samsung SDI assumes no responsibility for its suitability or accuracy or the use of such information for products other than Samsung Staron® solid surfaces & Radianz® quartz surfaces.

